



HYUNDAI ROBOT SERIES







Off-Line Programming

Simulate and create robot applications in your office

- ROBCAD Interface
- Teaching Pendant Interface
- File Up / Down Load
- RCS (Robot Control Simulation)

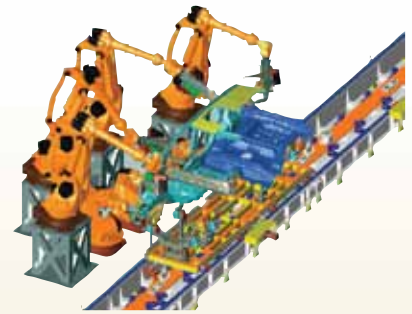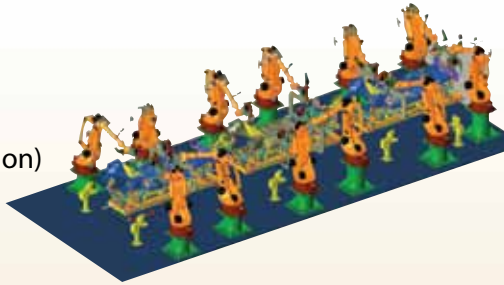

Certificate (ISO 9001, ISO 14001, QS-9000TE, CE, NRTL)



Republic of Korea

Head Office

1000 Bangeojin sunhwan-doro, Dong-gu, Ulsan, Korea
TEL : +82 52 202 7901/6233 / FAX : +82 52 202 7900
E-mail: machinery@hhi.co.kr

Seoul Office

140-2, Gye-dong, Jongno-gu, Seoul
TEL : +82 2 746 4713 / FAX : +82 2 746 4720

Ansan Office

1431-2, Sa-dong, Sangnok-gu, Ansan-si, Gyeonggi-do
TEL : +82 31 409 4945 / FAX : +82 31 409 4946

Cheonan Office

355-15, Daga-dong, Cheonan-si, Chungcheongnam-do
TEL : +82 41 576 4294 / FAX : +82 41 576 4296

Daegu Office

223-5, Beomeo 2-dong, Suseong-gu, Daegu
TEL : +82 53 746 6232~3 / FAX : +82 53 746 6231

Gwangju Office

415-2, Nongseong-dong, Seo-gu, Gwangju
TEL : +82 62 363 5272 / FAX : +82 62 363 5273

Overseas

Chicago, U.S.A

955 Estes Avenue, Elk Grove Village IL
60007, U.S.A
TEL : +1 800 423 8721
FAX : +1 847 437 3574

Houston, U.S.A

1400 Broadfield, Suite 110, Park 10 Center
Houston, Texas 77084, U.S.A
TEL : +1 281 578 7097
FAX : +1 281 578 8317

London, U.K

2nd Floor, The Triangle 5-17,
Hammersmith Grove London W6 0LG, U.K
TEL : +44 20 8741 0501
FAX : +44 20 8741 5620/8834 7281

Rotterdam, Netherland

Folkert Elsingastraat 7
3067 NW, Rotterdam, The Netherland
TEL : +31 10 212 1567
FAX : +31 10 212 5134

Shanghai, China

Room 802, South Area Office Building
#1500, Henkun Road, Minhang District,
Shanghai, China
TEL : +86 21 3357 5799
FAX : +86 21 3357 5809

Beijing, China

Beijing Hyundai Jingcheng
No. 2. Nanli, Luguoqiao
Fengtai District, Beijing, China
TEL : +86 10 8321 2588
FAX : +86 10 8321 2188

Mumbai, India

5th Floor, East Quadrant, The IL & FS
Financial Centre Plot no. C-22, G-Block,
Bandra-Kurla Complex Bandra (E), Mumbai
400-051, India
TEL : +91 22 2653 3420~26
FAX : +91 22 2653 3429~30

Controller Specifications

Item	Specification	
Model Name	Hi5	
Control Hardware	Multi Processor System	
Execution Mode	Teaching & Playback	
Interpolation Type	Point-to-Point, Linear, Circular	
Max. Axes	Max. 16 Axes Simultaneously	
Number of Step	17,000 Points	
External Program Selection	Binary 255 / Discrete 8	
Position Detector	Serial Absolute Encoder	
Program Back-up	USB Memory	
Servo Control	Full Digital Servo	
Digital Input / Output	Max. Input : 4096 / Output : 4096 Points	
Analog Input / Output	Input : 8 ch / Output : 8 ch	
Conveyor Pulse Counter	Differential Input / Open Collector Input, 2 ch	
Communication	Ethernet	100 Base T (2 Ports)
	CAN	User 1 / User 2
	Serial	RS232C, RS422 (RS485)
	Field Bus	CC-Link, Profibus-DP, Devicenet, Modbus
Rated Supply Voltage	AC220V ± 10%, 50 / 60 Hz	
Max. Rated Power	4.4 kVA, 7.8 kVA, 10.5 kVA	
Cabinet Dimension (WxDxH)	650 mm x 600 mm x 1,100 mm (Except Caster)	
Weight	150 kg (Without Transformer)	
Protection Classification	IP54	
Ambient Temperature	0 ~ 45 °C	

Teaching Pendant Specifications

Item	Specification
Microprocessor	32 bits RISC Processor
Operating System	Windows CE
Display	7" Color TFT-LCD
Operation Mode	Menu Driven and Code Input / Touch Panel

• Easy and simple operation

- Easy/convenient programming language similar to BASIC

• Easy maintenance

- Excellent maintenance ability using on-line display function

• Advanced control technology

- Dynamic control
- Advanced vibration suppression control
- Extended torque-velocity control


• Safety

- Compliant with ANSI/RIA15.6_1999 and CE Directives

• Compatibility and connectivity

- Embedded soft PLC
- Fieldbus : CC-Link, Profibus-DP, Devicenet, Modbus, etc.
- Ethernet, Serial Communication

System Configuration

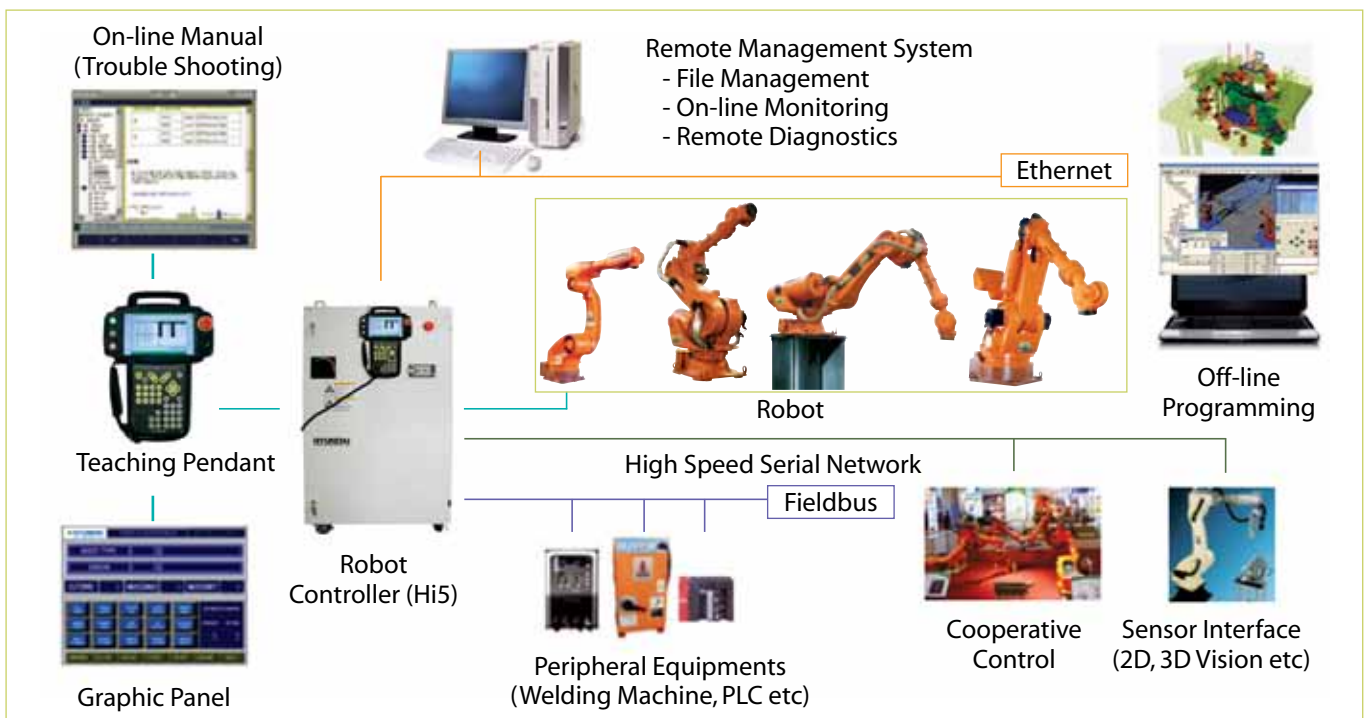

■ Robot Application



Car body line in China



Car body line in Czech



Arc welding robot



Inspection robot system







Handling robot for press line










Spot welding robot for train








Hyundai Robot Series

Model						
		HA006	HA010LW	HA020W	HH030L	
Payload		6 kg	10 kg	20 kg	30 kg	
Max. Reach		1,394 mm	1,986 mm	1,765 mm	2,535 mm	
Degree of freedom		6 Axes	6 Axes	6 Axes	6 Axes	
Installation		Floor / Wall / Ceiling	Floor / Wall / Ceiling	Floor / Wall / Ceiling	Floor / Wall / Ceiling	
Max. Motion Range	S	Swivel	±180°	±180°	±180°	
	H	For/Backward	+180° ~ -60°	+190° ~ -70°	+190° ~ -70°	+180° ~ -65°
	V	Up/Downward	+110° ~ -80°	+200° ~ -80°	+200° ~ -80°	+180° ~ -80°
	R2	Rotation 2	±180°	±195°	±195°	±360°
	B	Bending	±135°	±135°	±135°	±125°
	R1	Rotation 1	±360°	±360°	±360°	±360°
Max. Speed	S	Swivel	170 °/s	150 °/s	170 °/s	150 °/s
	H	For/Backward	170 °/s	140 °/s	160 °/s	140 °/s
	V	Up/Downward	170 °/s	150 °/s	170 °/s	150 °/s
	R2	Rotation 2	335 °/s	300 °/s	335 °/s	250 °/s
	B	Bending	335 °/s	300 °/s	335 °/s	250 °/s
	R1	Rotation 1	500 °/s	520 °/s	600 °/s	350 °/s
Allowable Moment	R2	Rotation 2	1.2 kgf.m	2.5 kgf.m	4 kgf.m	20.4 kgf.m
	B	Bending	1.2 kgf.m	2.5 kgf.m	4 kgf.m	20.4 kgf.m
	R1	Rotation 1	0.6 kgf.m	1.1 kgf.m	2 kgf.m	10.2 kgf.m
Repeatability		±0.06 mm	±0.06 mm	±0.06 mm	±0.15 mm	
Ambient Temperature		0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	
Approximate Weight		140 kg	235 kg	235 kg	650 kg	
Max. Rated Power		4.4 kVA				
Option				Wrist IP67	Wrist IP67	
Application	Arc Welding		●	●	●	
	Spot Welding					
	Handling		●	●	●	●
	Sealing		●	●	●	●
	Others					







High Speed

						
HH050	HR050P	YS080	YS100A	HH100SL	HH130L	HS150L
50 kg	50 kg	80 kg	100 kg	100 kg	130 kg	150 kg
2,239 mm	2,041 mm	2,239 mm	2,239 mm	3,507 mm	3,082 mm	3,082 mm
6 Axes	3 Axes	6 Axes	6 Axes	6 Axes	6 Axes	6 Axes
Floor / Wall / Ceiling	Floor	Floor / Wall / Ceiling	Floor / Wall / Ceiling	Shelf	Floor	Floor
±180°	-	±180°	±180°	±180°	±180°	±180°
+180° ~ -65°	+160° ~ -80°	+180° ~ -65°	+180° ~ -65°	+125° ~ -70°	+155° ~ +10°	+155° ~ +10°
+180° ~ -80°	+57° ~ -80°	+180° ~ -80°	+180° ~ -80°	+190° ~ -80°	+190° ~ -80°	+190° ~ -80°
±360°	-	±360°	±360°	±360°	±360°	±360°
±125°	±127°	±125°	±125°	±125°	±125°	±130°
±360°	-	±360°	±360°	±360°	±360°	±360°
175°/s	-	170°/s	150°/s	105°/s	105°/s	95°/s
175°/s	130°/s	140°/s	130°/s	85°/s	85°/s	95°/s
175°/s	170°/s	160°/s	140°/s	95°/s	95°/s	95°/s
250°/s	-	230°/s	200°/s	170°/s	170°/s	150°/s
250°/s	250°/s	230°/s	200°/s	155°/s	155°/s	145°/s
350°/s	-	350°/s	300°/s	270°/s	270°/s	220°/s
22 kgf.m	-	40.8 kgf.m	50 kgf.m	105 kgf.m	105 kgf.m	105 kgf.m
22 kgf.m	18 kgf.m	40.8 kgf.m	50 kgf.m	105 kgf.m	105 kgf.m	105 kgf.m
15 kgf.m	9 kgf.m	20.4 kgf.m	25 kgf.m	50 kgf.m	50 kgf.m	50 kgf.m
±0.15 mm	±0.07 mm	±0.15 mm	±0.25 mm	±0.25 mm	±0.25 mm	±0.25 mm
0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)
645 kg	600 kg	645 kg	645 kg	1,450 kg	1,400 kg	1,295 kg
8 kVA						
Wrist IP67		Wrist IP67	Wrist IP67			
		●	●	●	●	●
●	●	●	●	●	●	●
Press Handling	Palletizing			Press Handling	Press Handling	

High Reliability

						
HP160	HS165D	HS165DC	HS165	HS165S	HS200	HS200S
160 kg	165 kg	165 kg	165 kg	165 kg	200 kg	200 kg
3,128 mm	1,350 mm	920 mm	2,666 mm	3,090 mm	2,666 mm	3,090 mm
4 Axes	6 Axes	5 Axes	6 Axes	6 Axes	6 Axes	6 Axes
Floor	Floor	Floor	Floor	Shelf	Floor	Shelf
±180°	±170°	±30°	±180°	±180°	±180°	±180°
+135° ~ -10°	+160° ~ -30°	+120° ~ -35°	+155° ~ +10°	+125° ~ -70°	+155° ~ +10°	+125° ~ -70°
+75° ~ -65°	+90° ~ -60°	-	+190° ~ -80°	+190° ~ -80°	+190° ~ -80°	+190° ~ -80°
-	±360°	±360°	±360°	±360°	±360°	±360°
-	±130°	±130°	±130°	±130°	±125°	±125°
±360°	±360°	±360°	±360°	±360°	±360°	±360°
130 %/s	100 %/s	100 %/s	105 %/s	105 %/s	95 %/s	95 %/s
120 %/s	90 %/s	90 %/s	105 %/s	105 %/s	95 %/s	95 %/s
120 %/s	90 %/s	-	105 %/s	105 %/s	95 %/s	95 %/s
-	150 %/s	150 %/s	150 %/s	150 %/s	135 %/s	135 %/s
-	145 %/s	145 %/s	145 %/s	145 %/s	120 %/s	120 %/s
300 %/s	220 %/s	180 %/s	220 %/s	220 %/s	190 %/s	190 %/s
-	100 kgf.m	100 kgf.m	105 kgf.m	105 kgf.m	136 kgf.m	136 kgf.m
-	100 kgf.m	100 kgf.m	105 kgf.m	105 kgf.m	136 kgf.m	136 kgf.m
50 kgf.m	50 kgf.m	50 kgf.m	50 kgf.m	50 kgf.m	72 kgf.m	72 kgf.m
±0.5 mm	±0.2 mm	±0.2 mm	±0.2 mm	±0.2 mm	±0.2 mm	±0.2 mm
0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)
1,495 kg	810 kg	576 kg	1,250 kg	1,540 kg	1,300 kg	1,595 kg
			Wrist IP67			
	●	●	●	●	●	●
●	●	●	●	●	●	●
Palletizing						

Wide Working Envelope

					
HX200L	HX300	HX300L	HX400	HX400S	HX500
200 kg	300 kg	300 kg	400 kg	400 kg	500 kg
3,056 mm	2,573 mm	3,056 mm	2,573 mm	3,106 mm	2,573 mm
6 Axes	6 Axes	6 Axes	6 Axes	6 Axes	6 Axes
Floor	Floor	Floor	Floor	Shelf	Floor
±180°	±180°	±180°	±180°	±180°	±180°
+165° ~ +15°	+165° ~ +15°	+165° ~ +15°	+165° ~ +15°	+95° ~ -50°	+165° ~ +15°
+60° ~ -70°	+60° ~ -70°	+60° ~ -70°	+60° ~ -70°	+60° ~ -70°	+60° ~ -70°
±360°	±360°	±360°	±360°	±360°	±360°
±125°	±120°	±120°	±120°	±120°	±120°
±360°	±360°	±360°	±360°	±360°	±360°
95°/s	95°/s	95°/s	95°/s	85°/s	90°/s
95°/s	95°/s	95°/s	95°/s	85°/s	80°/s
95°/s	95°/s	95°/s	95°/s	85°/s	80°/s
120°/s	110°/s	100°/s	100°/s	100°/s	100°/s
120°/s	110°/s	100°/s	100°/s	100°/s	100°/s
180°/s	180°/s	160°/s	160°/s	160°/s	160°/s
132 kgf.m	170 kgf.m	170 kgf.m	200 kgf.m	200 kgf.m	200 kgf.m
132 kgf.m	170 kgf.m	170 kgf.m	200 kgf.m	200 kgf.m	200 kgf.m
62 kgf.m	70 kgf.m	70 kgf.m	84 kgf.m	84 kgf.m	84 kgf.m
±0.3 mm	±0.3 mm	±0.3 mm	±0.3 mm	±0.5 mm	±0.5 mm
0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)	0~45°C(273~318K)
2,265 kg	2,435 kg	2,685 kg	2,620 kg	2,910 kg	2,800 kg
10.5 kVA					
●	●	●	●	●	●
●	●	●	●	●	●